



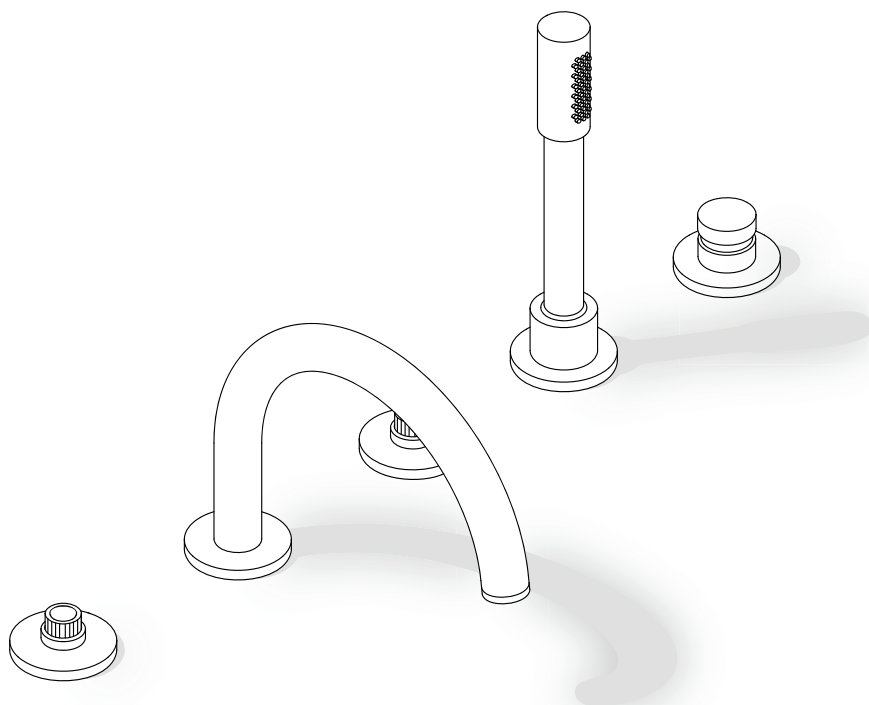


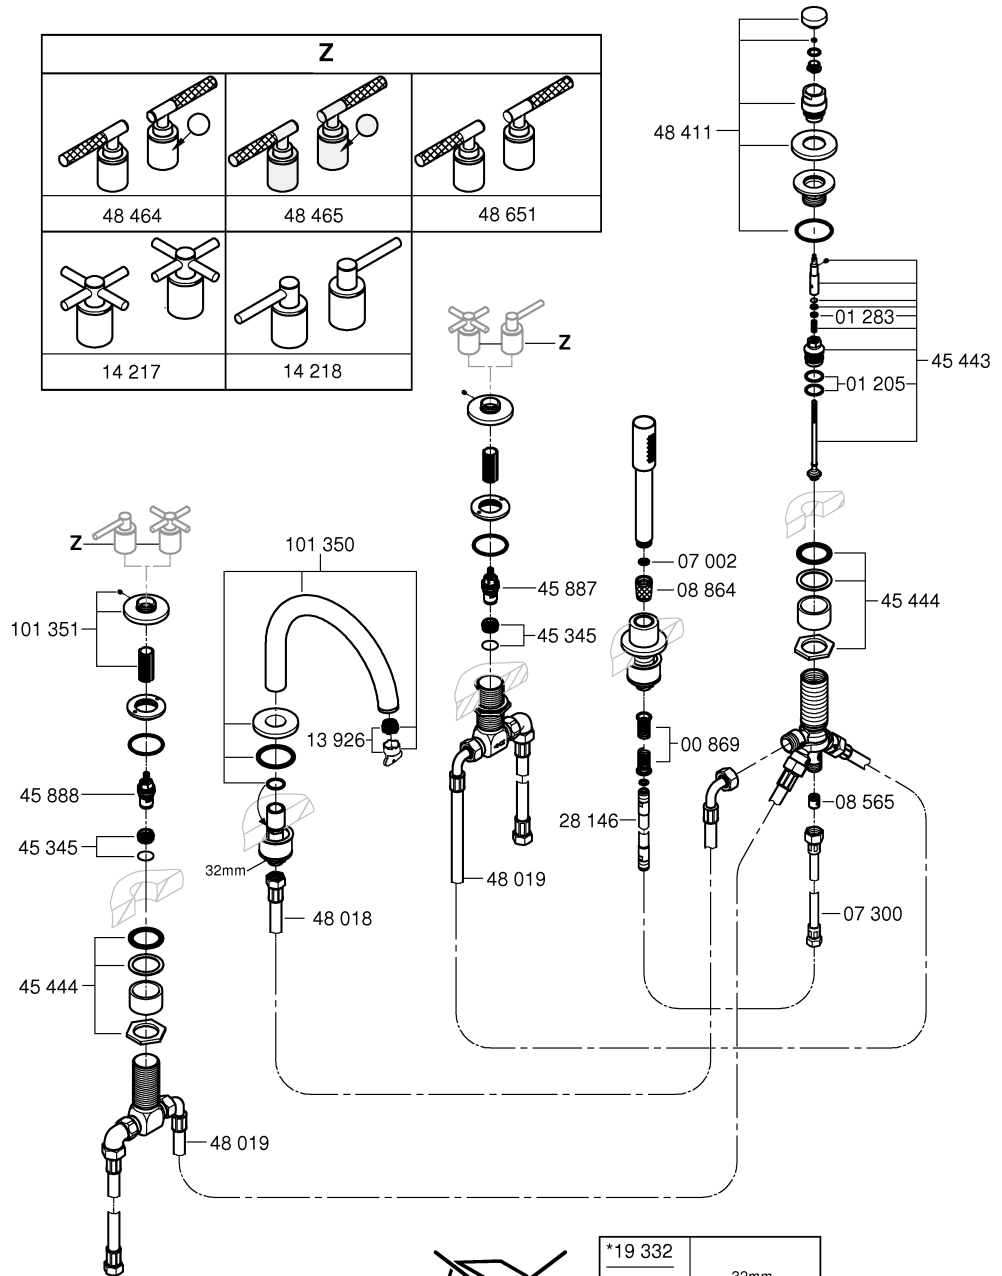


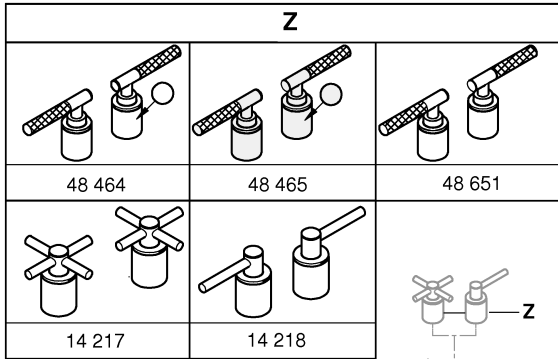

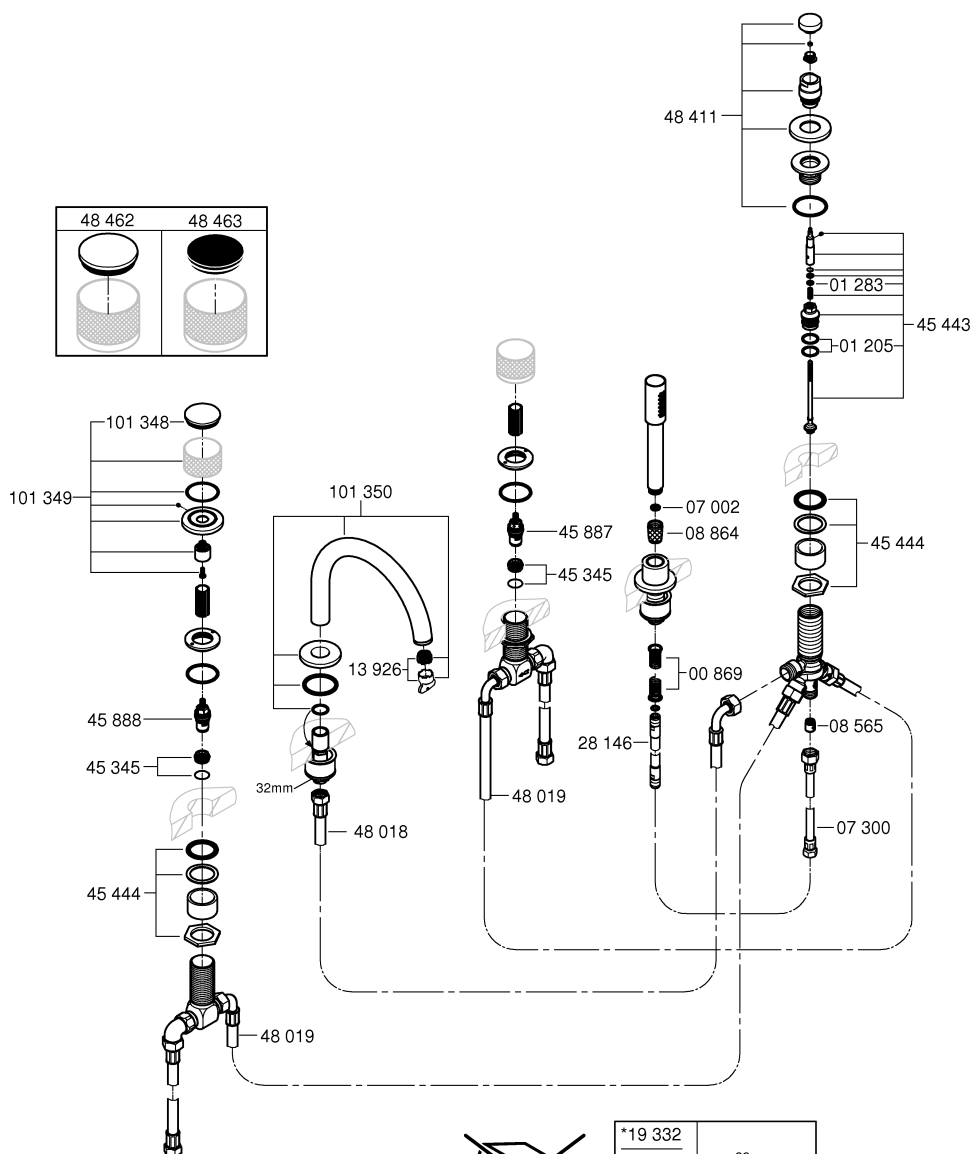

*





DIN EN
806
DIN EN
1717
DIN
1988




max. 10 bar
0,5 5 1

max. 70°
60°




2,5mm




*19 332




32mm




1a

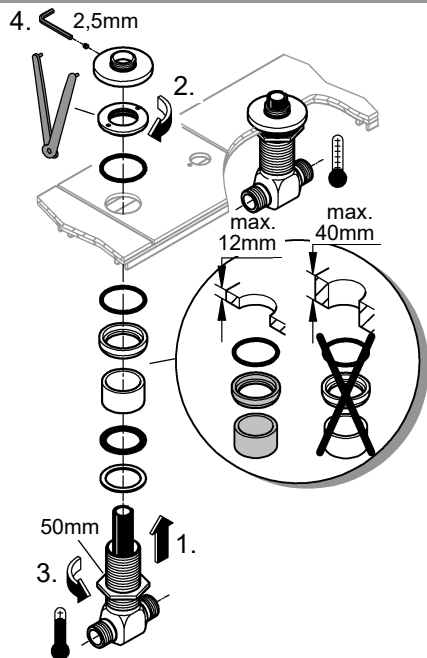

1b





2a

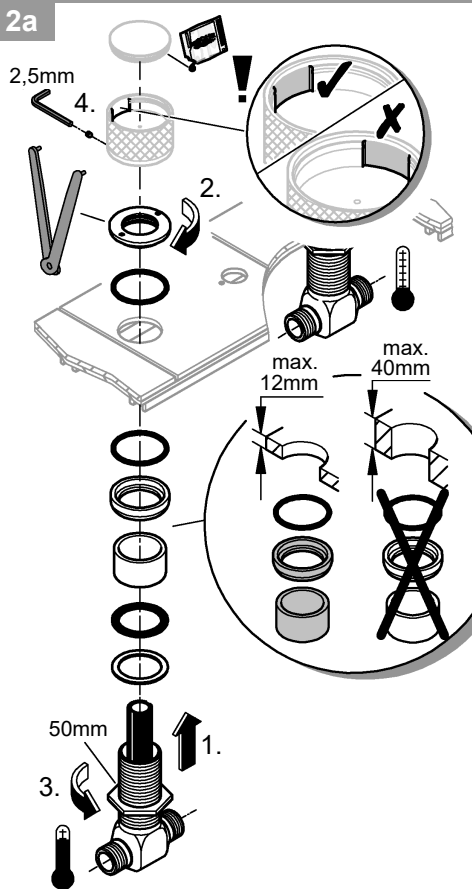




3

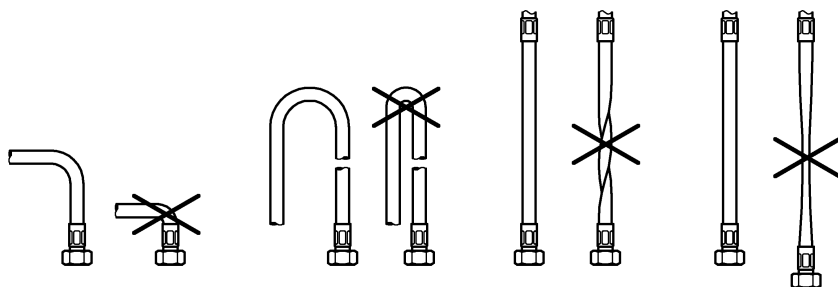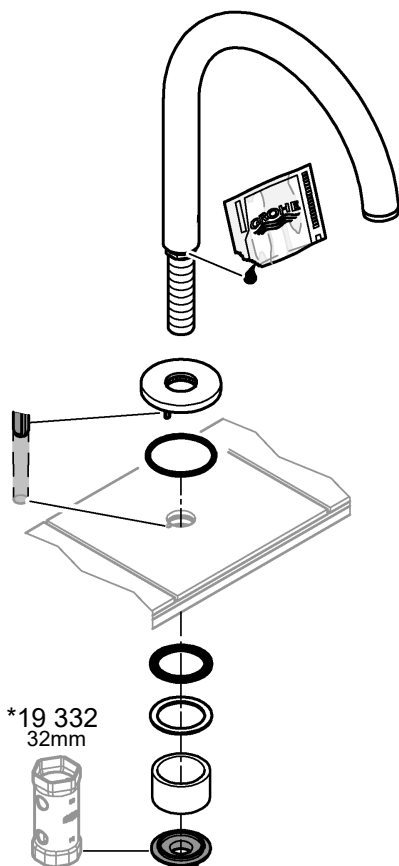





4

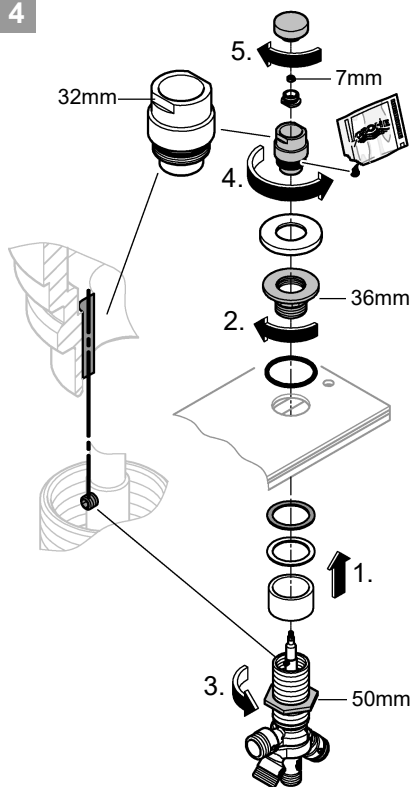


5

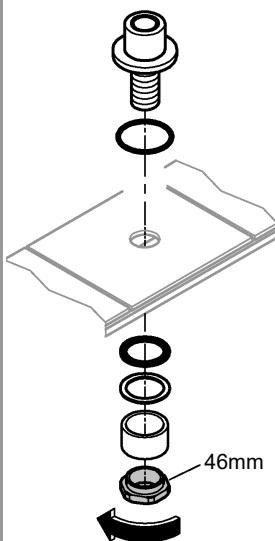


6

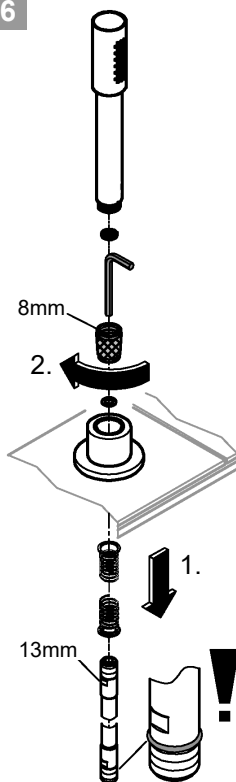




7

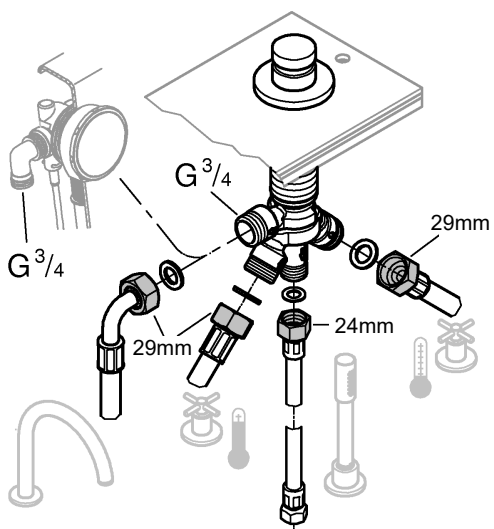

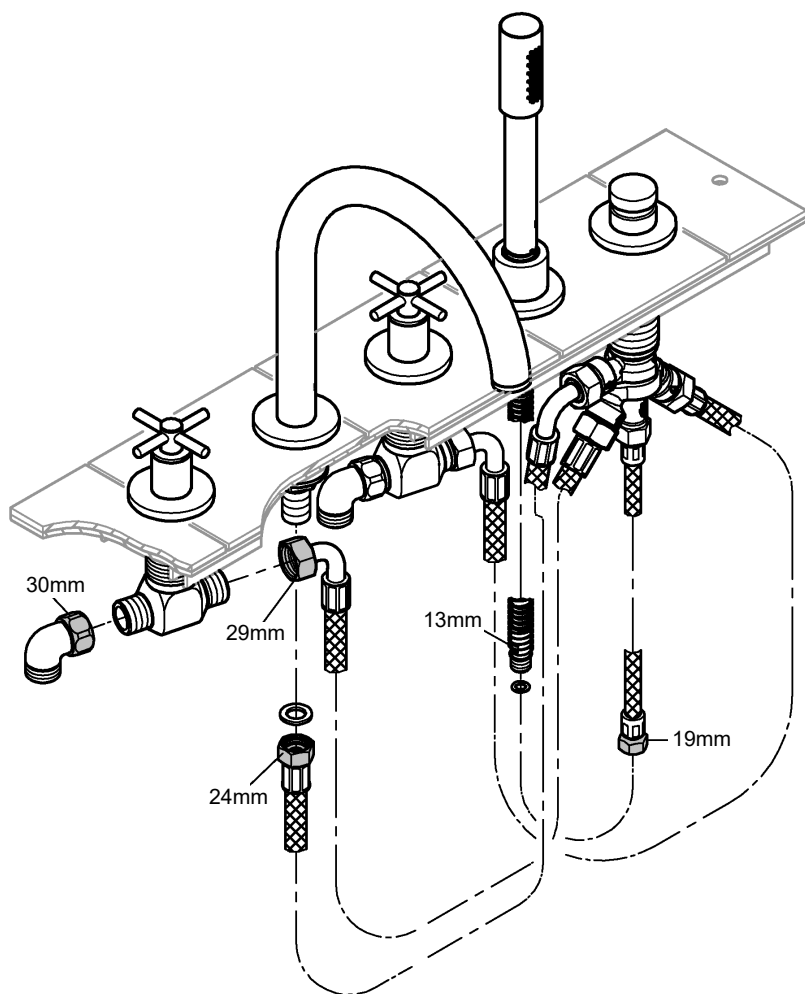



9a

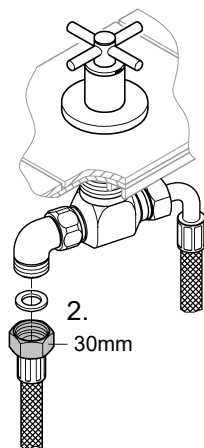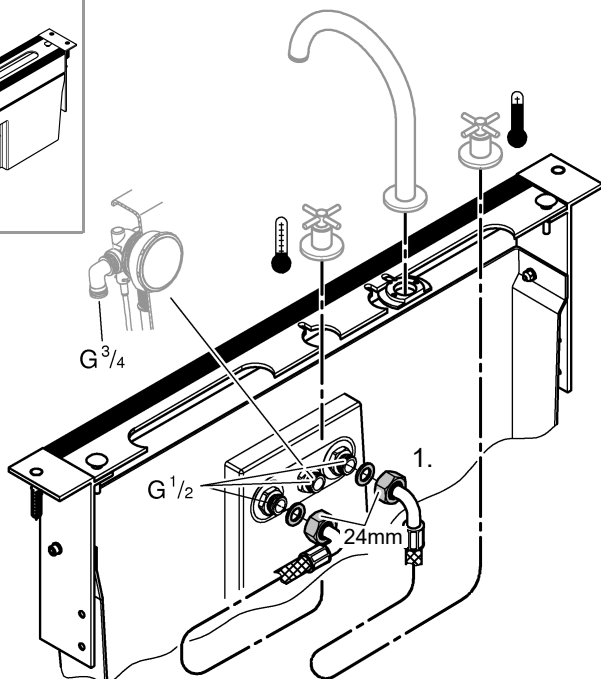

9b

